



TUBULAR SERIE

SUSPENDED



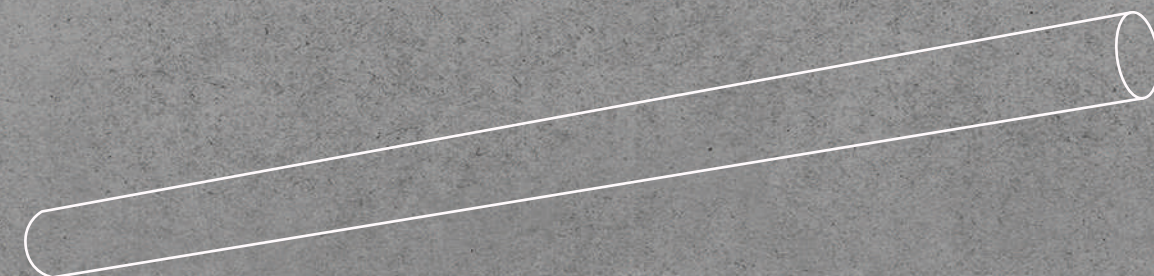

Tech-K Office/Architecture: Centralcorp.

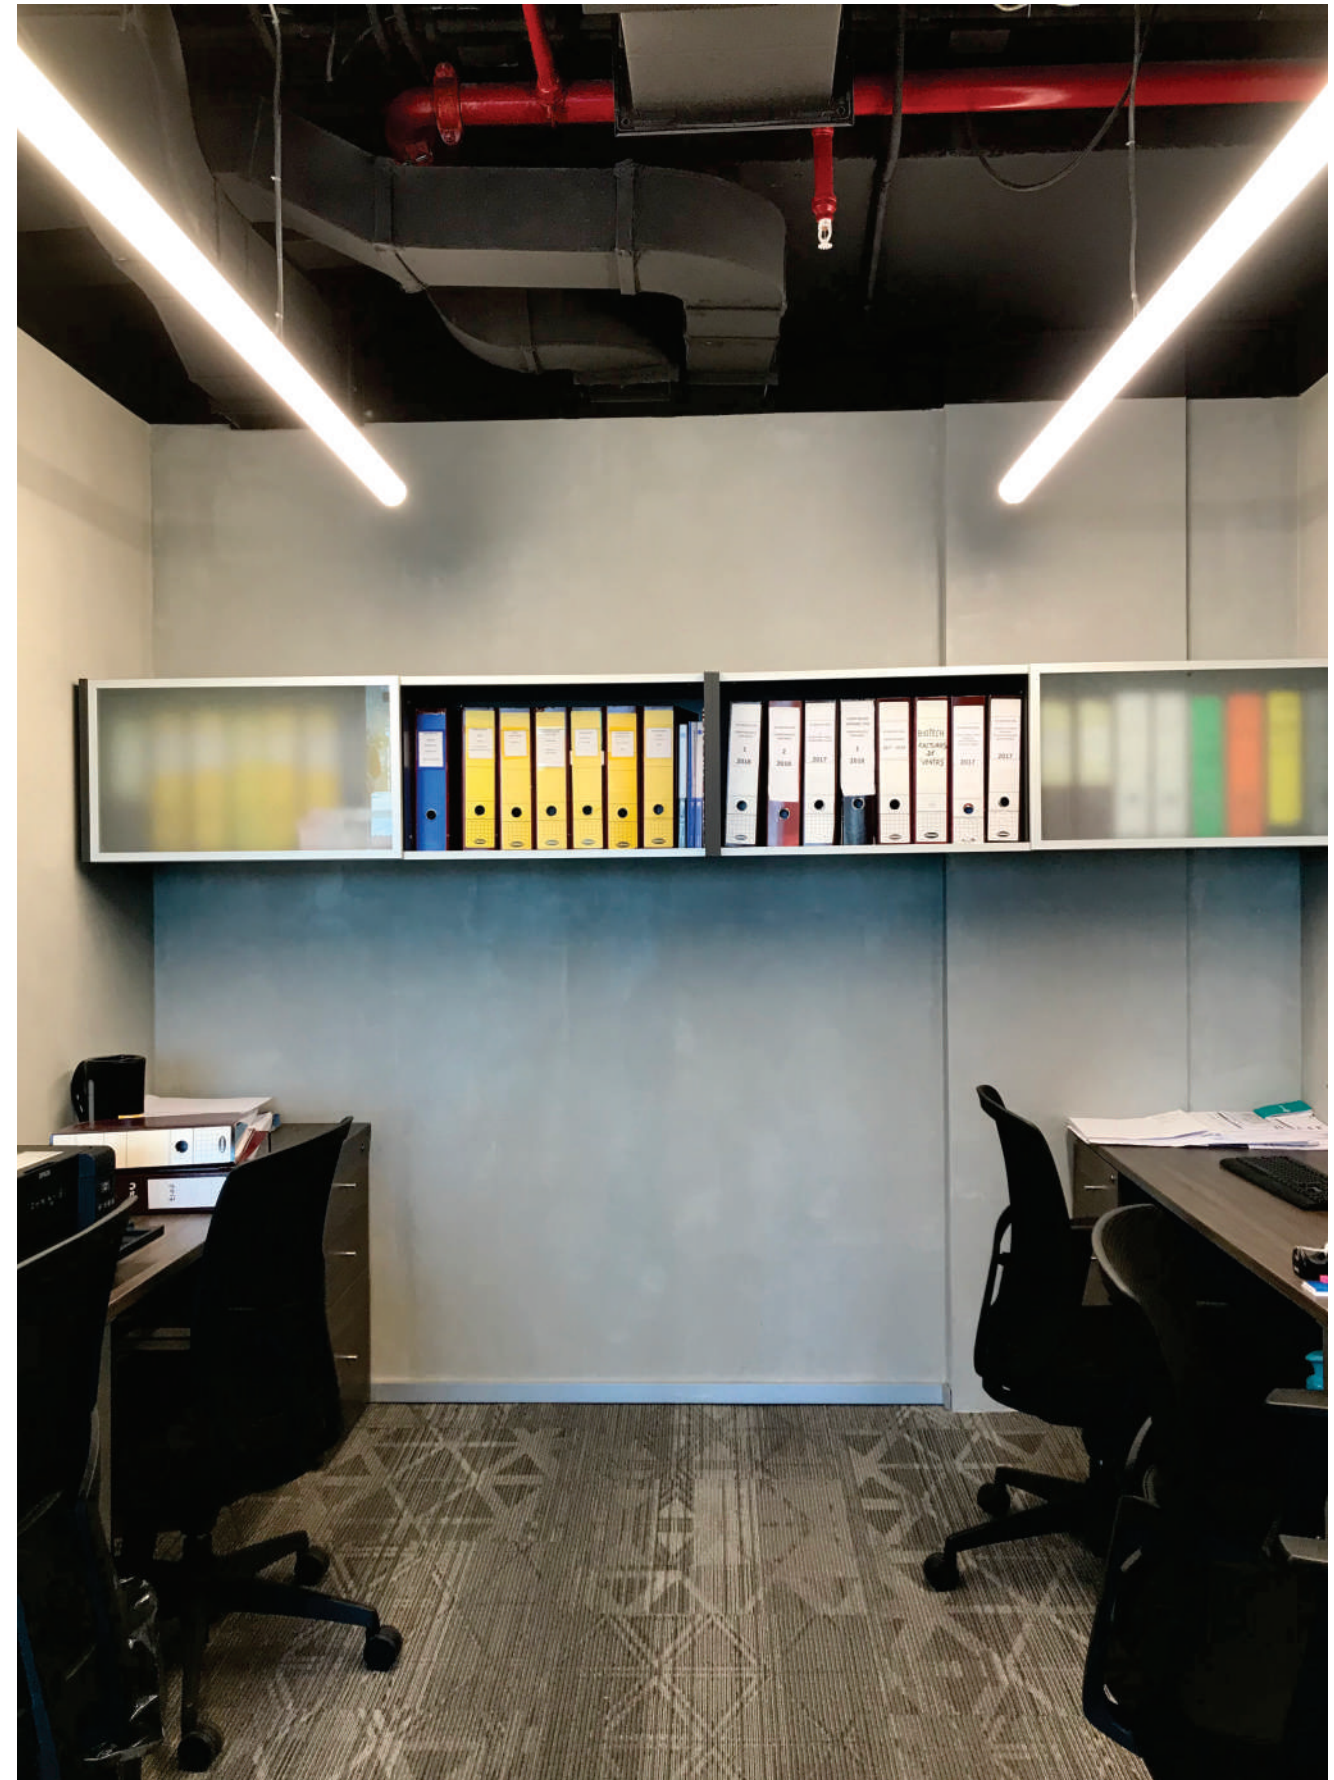

IGS GROUP Office/ Lighting Design: LEVO Studio/Architecture: Elton+Leniz.



MACAL Office/Architecture: Nicolas Arancibia Arquitecto.

TUBULAR SERIE

TX11-60 | TX13-120



SUSPENDED | SUSPENDED

Creating an incredible 360° lighting effect, the tubular led profiles becomes a great alternative for good lighting and out of the box design.

Its different size sections allow to fit any purpose.



Creando un increíble efecto luminoso de 360°, los perfiles LED tubulares se convierten en una gran alternativa para una buena iluminación con un diseño fuera de lo común.

Sus diferentes secciones permiten que se pueda adaptar a cualquier propósito.

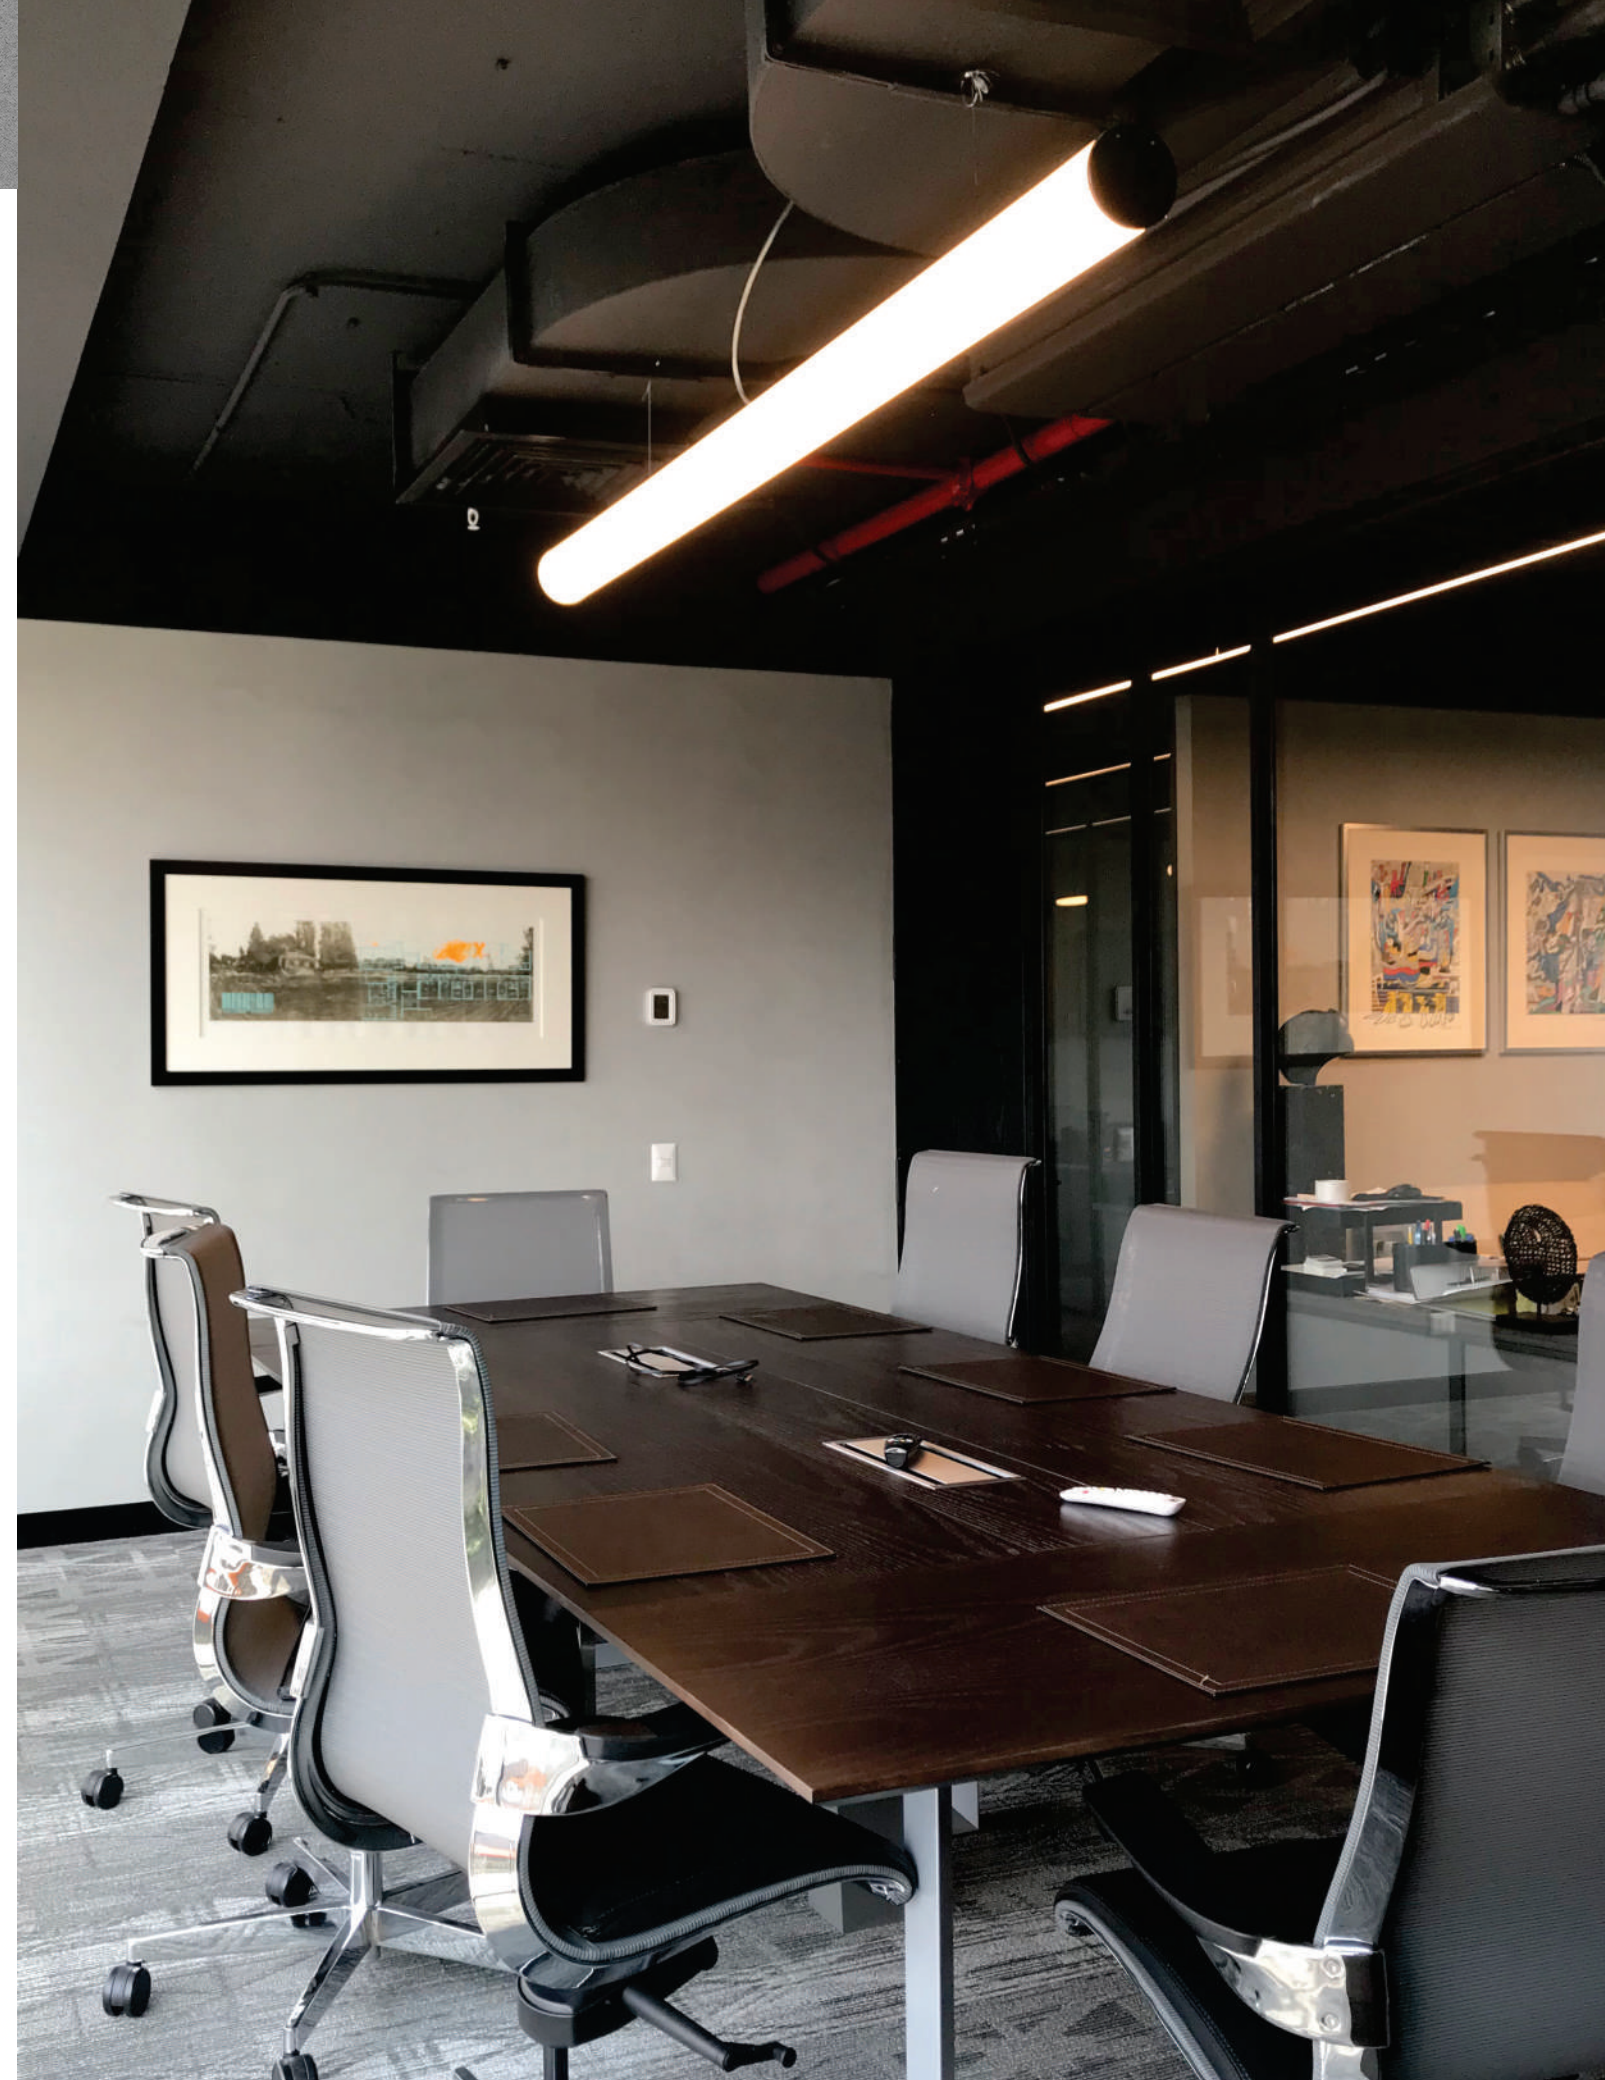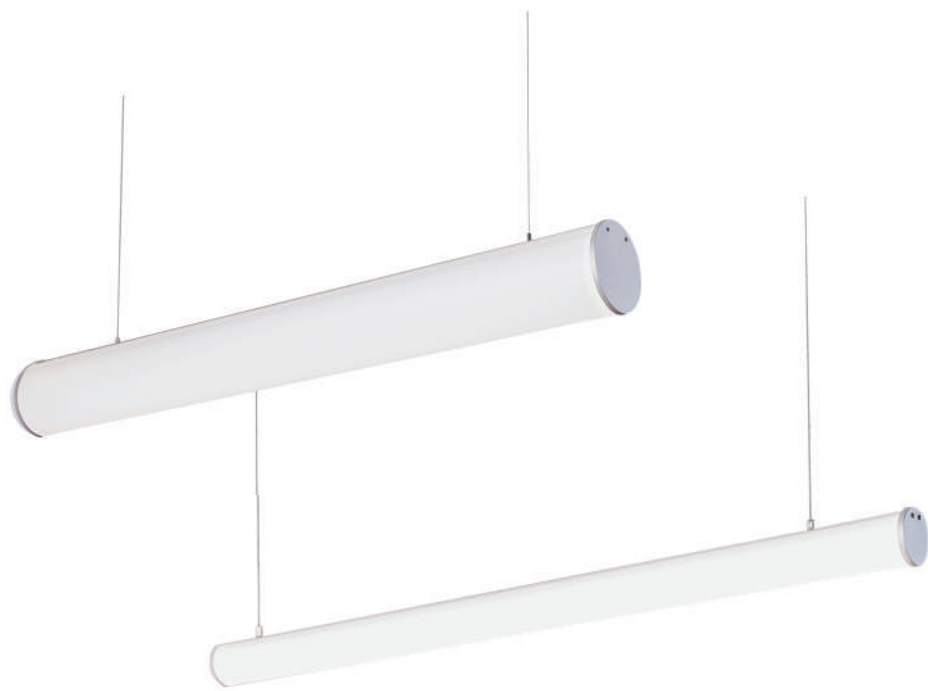

TX11-60

TUBULAR

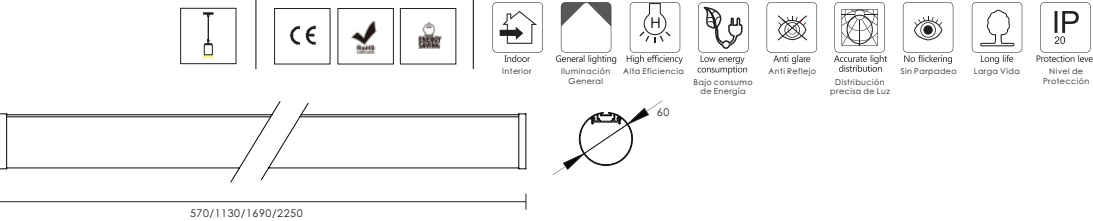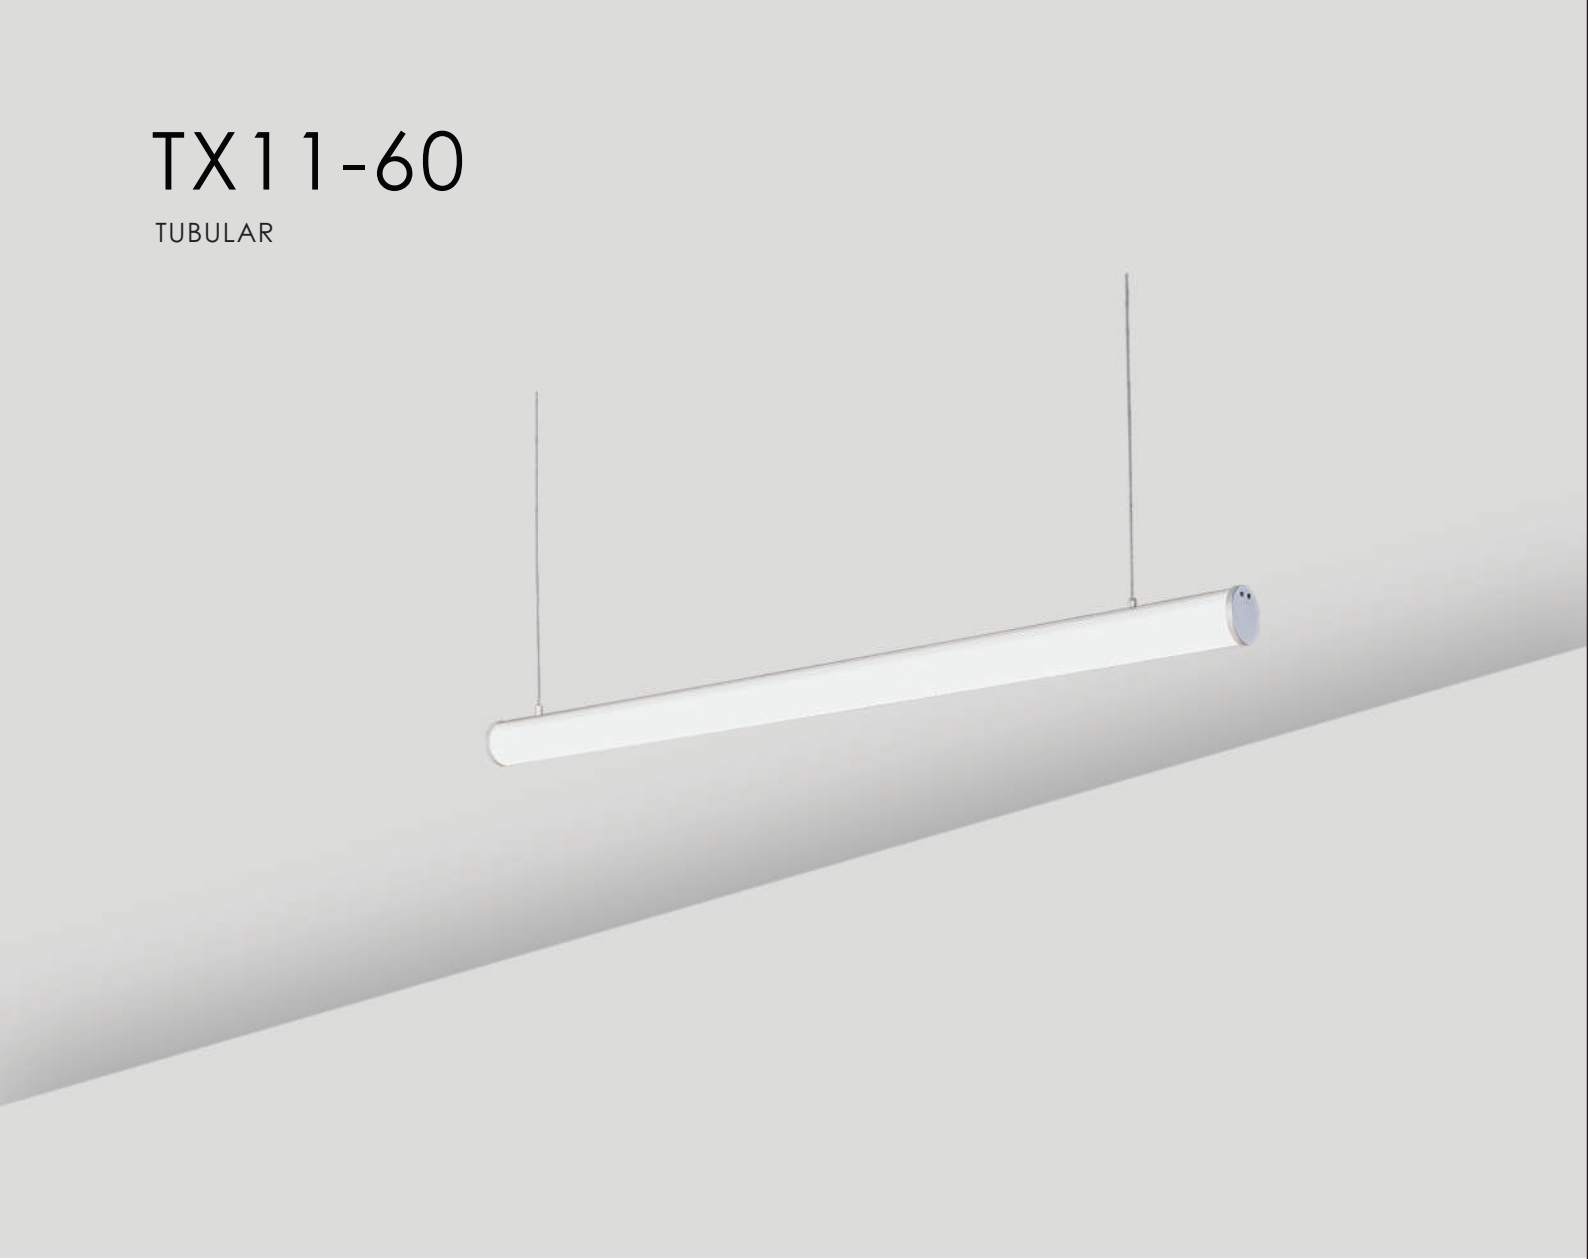

PRODUCT FEATURE / CARACTERÍSTICAS

- Tubular LED profile for pendant installation with electronic driver in external box.

- Compatible with emergency kit upon request.

- Options for 0-10V dimming, DALI dimming and color changing driver.

- Equipped with non-flicking driver and high lumen SMD LED chip.

- Long lifespan up to 50.000 hours, low decay, low maintenance cost.

- Distinguished end-caps. No screw to be appeared. No light leak.

- High grade aluminum, high quality surface painting.

- High efficiency PC and homogeneous light distribution, no shadow, anti-glare feature, easy installation to any shape.

Application: office, schools, hospitals, supermarkets, shopping mall, hotel, public areas, residences.

- Perfil LED tubular para suspender con driver en caja eléctrica externa.

- Compatible con kit de emergencia a pedido.

- Opciones para atenuación de 0-10 V, atenuación DALI y controlador de cambio de color.

- Equipado con un driver libre de parpadeo y un chip LED SMD de alto lumen.

- Vida útil de hasta 50.000 horas, baja degradación, bajo costo de mantenimiento.

- Tapas finales distinguidas, sin tornillos a la vista, sin fugas de luz.

- Aluminio de alta calidad, pintura superficial de alta calidad.

- PC de alta eficiencia y distribución de luz homogénea, sin sombras, antideslumbrante, fácil instalación de cualquier forma.

Aplicación: oficina, escuelas, hospitales, supermercados, centros comerciales, hoteles, áreas públicas, residencias.


TECHNICAL DATA/ DATOS TÉCNICOS

	Item No.	Dimension	Power	LED Output	System Output
	TX11-60-570	570*D60mm	18W	3060Lm	1800Lm
	TX11-60-1130	1130*D60mm	36W	6120Lm	3600Lm
	TX11-60-1690	1690*D60mm	54W	9180Lm	5400Lm
	TX11-60-2250	2250*D60mm	72W	12240Lm	7200Lm

PRODUCT OPTIONS/ OPCIONES DEL PRODUCTO



CCT	☒ 3000K ☐ 4000K ☐ 5000K ☐ 6000K
CRI	☐ 82+ ☐ 90+ ☐ 95+
Finish	☐ White ☒ Black ☐ Silver ☐ Custom Color
Dimming	☐ On/off ☐ 1-10V ☐ DALI ☒ Color Changing
Emergency	☐ None ☐ 1.5 hours,half power
Sensor	☐ None ☐ Motion and daylight sensor

PHOTOMETRIC CURVE/ CURVA FOTOMÉTRICA

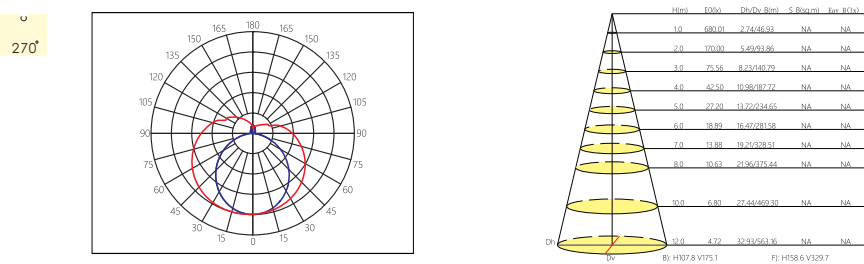

TX13-120

TUBULAR

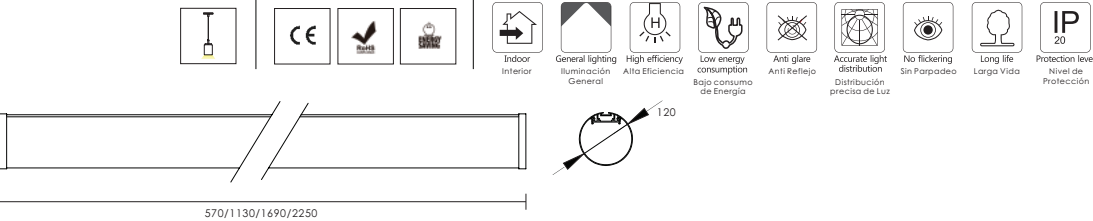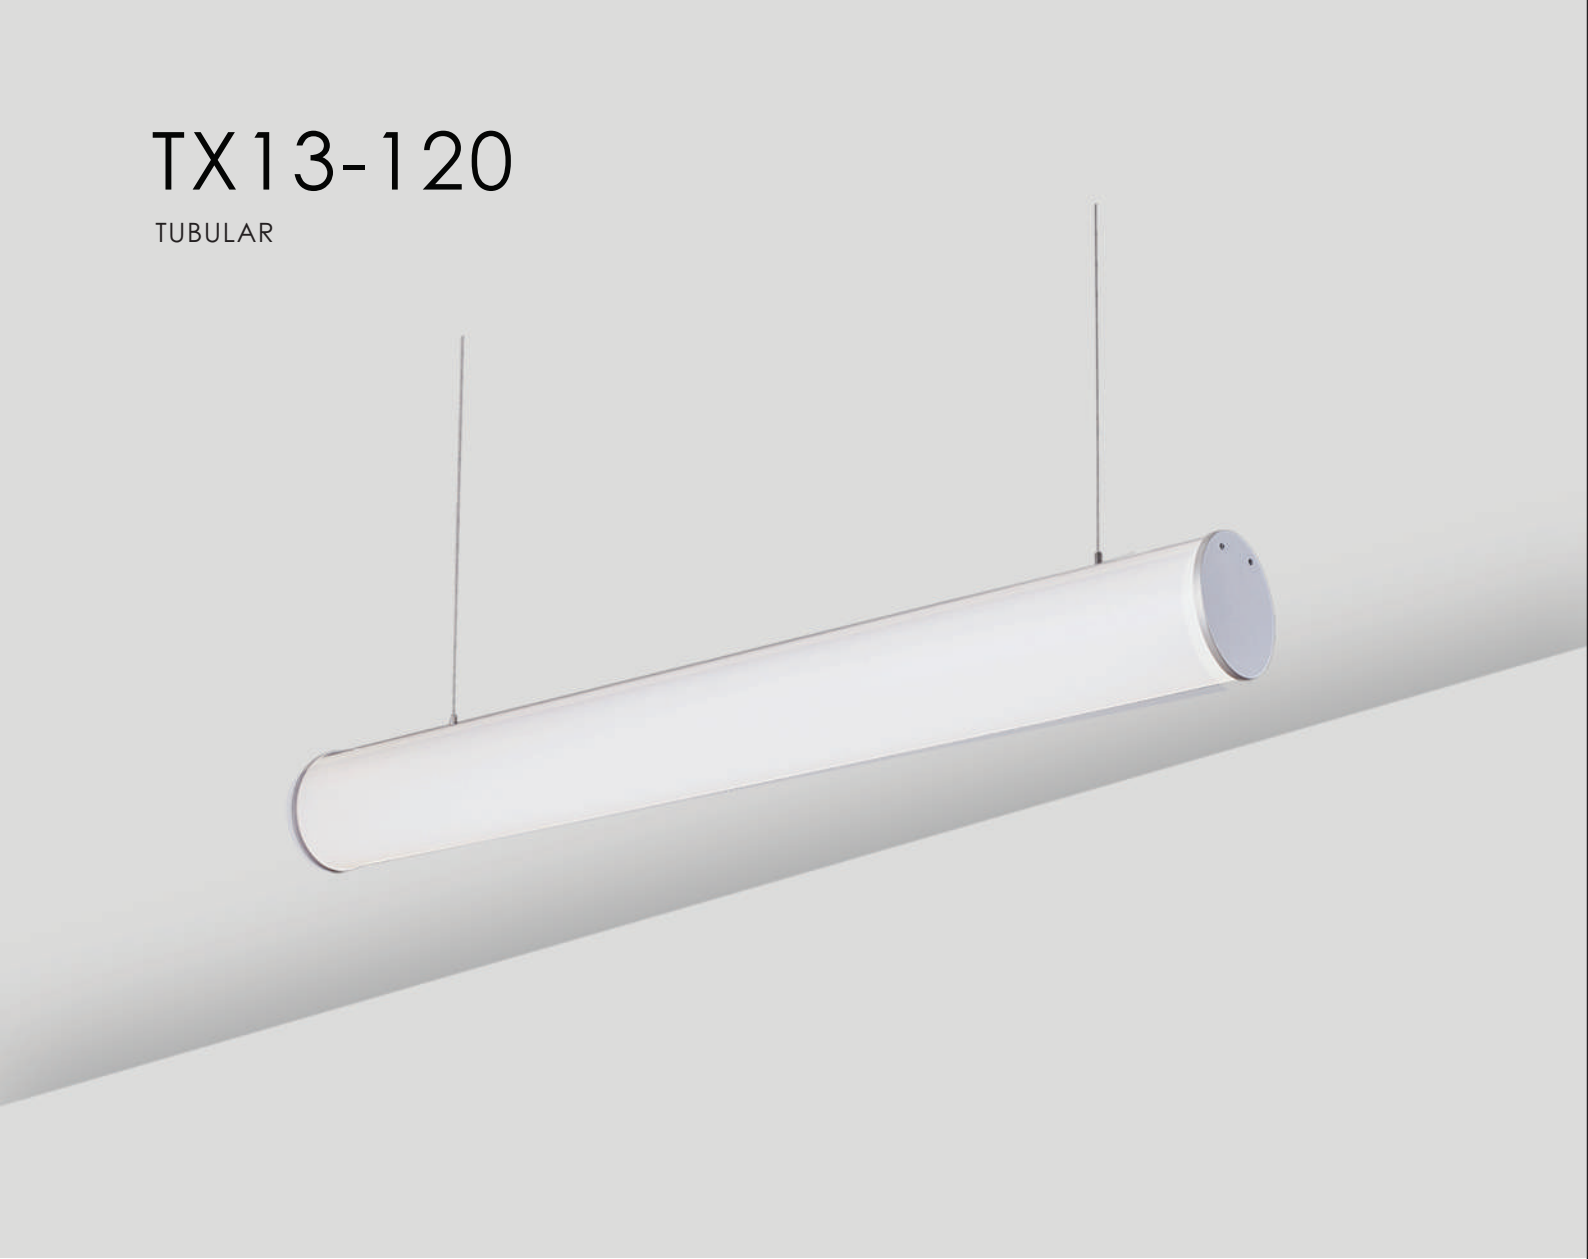

PRODUCT FEATURE / CARACTERÍSTICAS

- Tubular LED profile for pendant installation with electronic driver in external box.

- Compatible with emergency kit upon request.

- Options for 0-10V dimming, DALI dimming and color changing driver.

- Equipped with non-flicking driver and high lumen SMD LED chip.

- Long lifespan up to 50.000 hours, low decay, low maintenance cost.

- Distinguished end-caps. No screw to be appeared. No light leak.

- High grade aluminum, high quality surface painting.

- High efficiency PC and homogeneous light distribution, no shadow, anti-glare feature, easy installation to any shape.

Application: office, schools, hospitals, supermarkets, shopping mall, hotel, public areas, residences.
- Perfil LED tubular para suspender con driver en caja eléctrica externa.

- Compatible con kit de emergencia a pedido.

- Opciones para atenuación de 0-10 V, atenuación DALI y controlador de cambio de color.

- Equipado con un driver libre de parpadeo y un chip LED SMD de alto lumen.

- Vida útil de hasta 50.000 horas, baja degradación, bajo costo de mantenimiento.

- Tapas finales distinguidas, sin tornillos a la vista, sin fugas de luz.

- Aluminio de alta calidad, pintura superficial de alta calidad.

- PC de alta eficiencia y distribución de luz homogénea, sin sombras, antideslumbrante, fácil instalación de cualquier forma.

Aplicación: oficina, escuelas, hospitales, supermercados, centros comerciales, hoteles, áreas públicas, residencias.

TECHNICAL DATA/ DATOS TÉCNICOS

	Item No.	Dimension	Power	LED Output	System Output
	TX13-120-570	570*D120mm	18W	3060Lm	1800Lm
	TX13-120-1130	1130*D120mm	36W	6120Lm	3600Lm
	TX13-120-1690	1690*D120mm	54W	9180Lm	5400Lm
	TX13-120-2250	2250*D120mm	72W	12240Lm	7200Lm

PRODUCT OPTIONS/ OPCIONES DEL PRODUCTO

CCT	☒ 3000K ☐ 4000K ☐ 5000K ☐ 6000K
CRI	☐ 82+ ☐ 90+ ☐ 95+
Finish	☐ White ☒ Black ☐ Silver ☐ Custom Color
Dimming	☐ On/off ☐ 1-10V ☐ DALI ☒ Color Changing
Emergency	☐ None ☐ 1.5 hours,half power
Sensor	☐ None ☐ Motion and daylight sensor

PHOTOMETRIC CURVE/ CURVA FOTOMÉTRICA

