


XPANEL SERIE

SUSPENDED/SURFACE

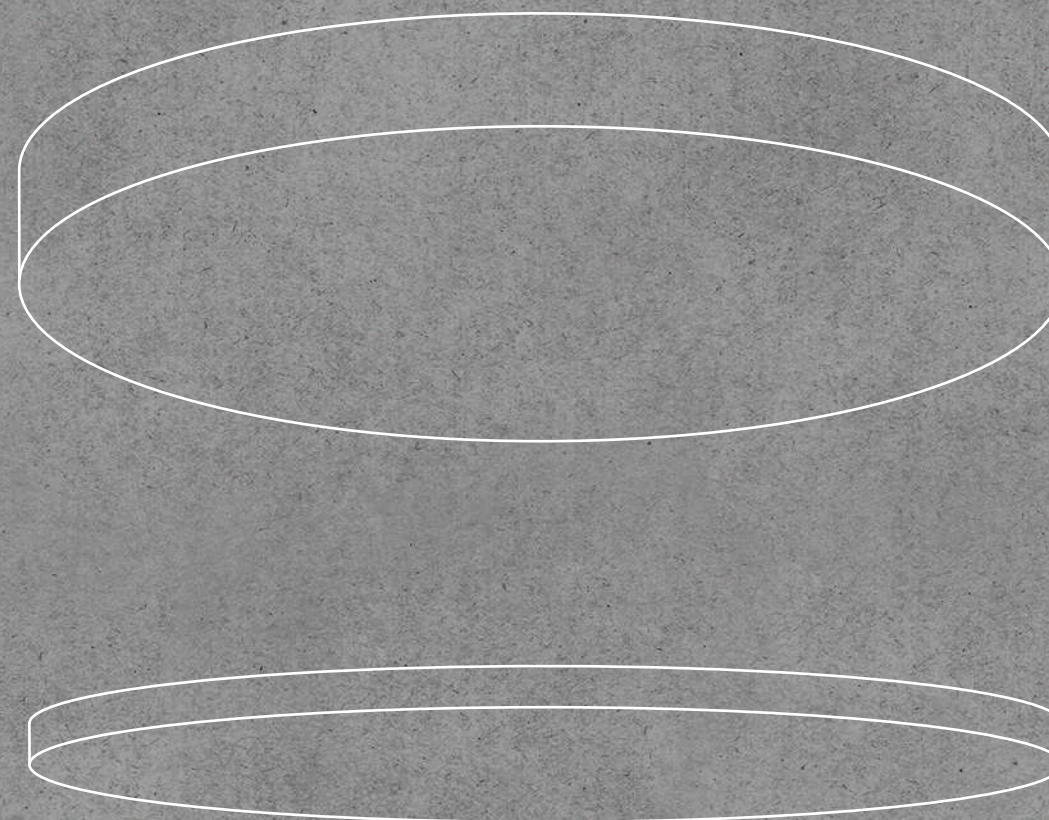

XPANEL SERIE

LED PANEL
SURFACE | SUSPENDED

The simplicity of the circumference inspires the XPANEL series, of LED panels for suspended or surface mounting.

By combining the different available diameters, interesting and unique designs can be achieved, while using them individually they can become the protagonists of the spaces.

Ideal for open and large or closed and small enclosures, institutional as residential, adapting to any space.

Perfect to combine with round acoustic panels.

La simplicidad de la circunferencia inspira la serie XPANEL, de paneles LED para suspender o sobreponer.

Combinando los diferentes diámetros disponibles, se pueden lograr diseños interesantes y únicos, mientras que al utilizarlos individualmente se pueden convertir en los protagonistas de los espacios.

Ideal para recintos abiertos y grandes o cerrados y pequeños, de carácter institucional como residencial, adaptándose a cualquier espacio.

Perfecto para combinar con paneles acústicos redondos.



XPANEL SERIE



Flexibility in Application

Luminarie available with translucent cover for uniform illuminance, or the microprismatic variant for glare-free lighting with an optimum UGR value of <19.

Especially in large projects, the wide range of options has many benefits: for instance, the various performance classes mean that different spaces concepts can be implemented cost effectively and energy efficiently, while maintaining a clean and uniform design style.

Flexibilidad en Aplicación

Luminarias disponibles con cubierta translúcida para iluminación uniforme, o la variante microprismática para una iluminación sin deslumbramiento con un valor UGR óptimo de <19.

Especialmente en grandes proyectos, la amplia gama de opciones tiene muchos beneficios: las diversas clases de rendimiento permiten que diferentes conceptos de espacios se pueden integrar de forma rentable y energéticamente eficiente, mientras se mantiene un diseño limpio y uniforme.

MOUNTING



MONTAJE

Wall
Pared

Ceiling
Techo


Suspended Cable
Cable Suspendido

Suspended Rod
Vástago para Suspend



XPANEL-R P

OPAL DIFFUSER/ DIFUSOR OPAL

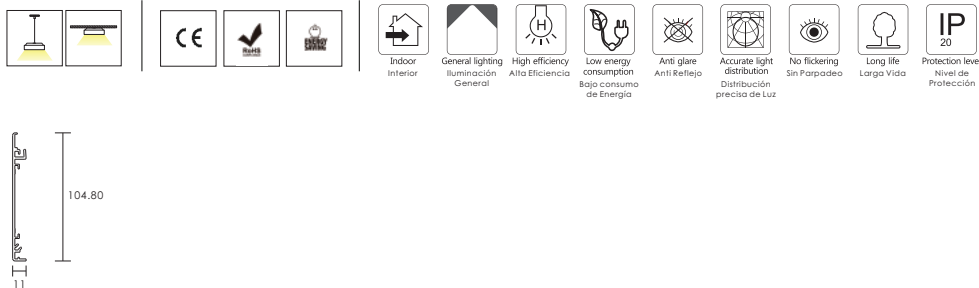

PRODUCT FEATURE / CARACTERÍSTICAS

- Round luminaire with opal diffuser, housing in aluminum rolled profile, seamlessly welded, surface powder coated.
 - For suspended or surface mounting.
 - Direct lighting.
 - Available in different diameters.
 - Compatible with emergency kit upon request.
 - Options for 0-10V dimming, DALI dimming and color changing driver.
 - Equipped with non-flicking driver and high lumen SMD LED chip.
 - Long lifespan up to 50.000 hours, low maintenance cost.
 - No screws or light leak.
 - High grade aluminum, high quality surface painting.
 - No shadows.

Application: office, schools, hospitals, supermarkets, shopping mall, hotel, public areas, residences.
- Luminaria redonda con difusor opal, carcasa en perfil laminado de aluminio, soldada a la perfección, superficie con recubrimiento en polvo.
 - Para montaje suspendido o en superficie.
 - Iluminación directa.
 - Disponible en diferentes diámetros.
 - Compatible con kit de emergencia a pedido.
 - Opciones para atenuación de 0-10 V, atenuación DALI y controlador de cambio de color.
 - Equipado en su interior con un driver libre de parpadeo y un chip LED SMD de alto lumen.
 - Vida útil de hasta 50.000 horas, bajo costo de mantenimiento.
 - Sin tornillos ni fugas de luz.
 - Aluminio de alta calidad, pintura superficial de alta calidad.
 - Sin sombras.

Aplicación: oficina, escuelas, hospitales, supermercados, centros comerciales, hoteles, áreas públicas, residencias.

TECHNICAL DATA/ DATOS TÉCNICOS

Item No.	Dimension	Power	LED Output	System Output
XPANEL-R600P	D600*H104.80mm	45W	4950Lm	4500Lm
XPANEL-R900P	D900*H104.80mm	65W	7150Lm	6500Lm
XPANEL-R1200P	D1200*H104.80mm	90W	9900Lm	9000Lm


PRODUCT OPTIONS/ OPCIONES DEL PRODUCTO

CCT	☒ 3000K ☒ 4000K ☒ 5000K ☐ 6000K
CRI	☐ 82+ ☐ 90+ ☐ 95+
Finish	☐ White ☒ Black ☐ Silver ☐ Custom Color
Dimming	☐ On/off ☐ 1-10V ☐ DALI ☒ Color Changing
Emergency	☐ None ☐ 1.5 hours, half power
Sensor	☐ None ☐ Motion and daylight sensor



XPANEL-R PM

PRISMATIC DIFFUSER/ DIFUSOR MICROPRISMÁTICO
UGR<19

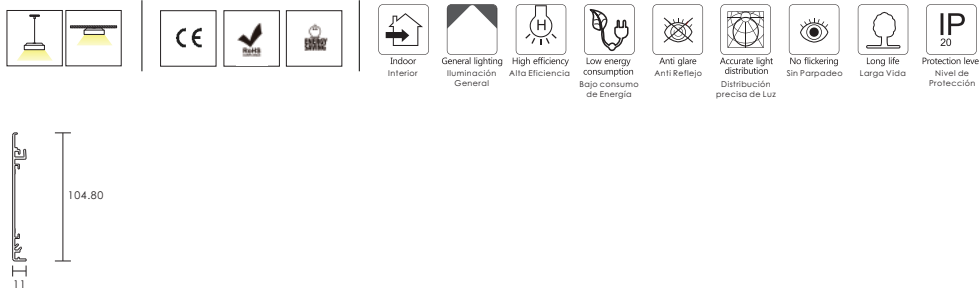

PRODUCT FEATURE / CARACTERÍSTICAS

- Round luminaire with prismatic diffuser, housing in aluminum rolled profile, seamlessly welded, surface powder coated.
- For suspended or surface mounting.
- Direct lighting.
- Available in different diameters.
- Compatible with emergency kit upon request.
- Options for 0-10V dimming, DALI dimming and color changing driver.
- Equipped with non-flicking driver and high lumen SMD LED chip.
- Long lifespan up to 50.000 hours, low maintenance cost.
- No screws or light leak.
- High grade aluminum, high quality surface painting.
- No shadows.

Application: office, schools, hospitals, supermarkets, shopping mall, hotel, public areas, residences.

- Luminaria redonda con difusor prismático, carcasa en perfil laminado de aluminio, soldada a la perfección, superficie con recubrimiento en polvo.
- Para montaje suspendido o en superficie.
- Iluminación directa.
- Disponible en diferentes diámetros.
- Compatible con kit de emergencia a pedido.
- Opciones para atenuación de 0-10 V, atenuación DALI y controlador de cambio de color.
- Equipado en su interior con un driver libre de parpadeo y un chip LED SMD de alto lumen.
- Vida útil de hasta 50,000 horas, bajo costo de mantenimiento.
- Sin tornillos ni fugas de luz.
- Aluminio de alta calidad, pintura superficial de alta calidad.
- Sin sombras.

Aplicación: oficina, escuelas, hospitales, supermercados, centros comerciales, hoteles, áreas públicas, residencias.

TECHNICAL DATA/ DATOS TÉCNICOS

Item No.	Dimension	Power	LED Output	System Output
XPANEL-R600PM	D600*H104.80mm	45W	4950Lm	4500Lm
XPANEL-R900PM	D900*H104.80mm	65W	7150Lm	6500Lm
XPANEL-R1200PM	D1200*H104.80mm	90W	9900Lm	9000Lm


PRODUCT OPTIONS/ OPCIONES DEL PRODUCTO

CCT	3000K 4000K 5000K 6000K
CRI	82+ 90+ 95+
Finish	White Black Silver Custom Color
Dimming	On/off 1-10V DALI Color Changing
Emergency	None 1.5 hours, half power
Sensor	None Motion and daylight sensor



XPANEL-FLAT

OPAL DIFFUSER/ DIFUSOR OPAL



PRODUCT FEATURE / CARACTERÍSTICAS

- Round slim luminaire with opal diffuser with decorative bezel
- For suspended or surface mounting.
- Direct lighting.
- Available in different diameters.
- Compatible with emergency kit upon request.
- Options for 0-10V dimming, DALI dimming and color changing driver.
- Equipped with non-flicking driver and high lumen SMD LED chip.
- Long lifespan up to 50.000 hours, low maintenance cost.
- No screws or light leak.
- High grade aluminum, high quality surface painting.
- No shadows.

Application: office, schools, hospitals, supermarkets, shopping mall, hotel, public areas, residences.

- Luminaria delgada redonda con difusor opal y bisel decorativo
- Para montaje suspendido o en superficie.
- Iluminación directa.
- Disponible en diferentes diámetros.
- Compatible con kit de emergencia a pedido.
- Opciones para atenuación de 0-10 V, atenuación DALI y controlador de cambio de color.
- Equipado en su interior con un driver libre de parpadeo y un chip LED SMD de alto lumen.
- Vida útil de hasta 50.000 horas, bajo costo de mantenimiento.
- Sin tornillos ni fugas de luz.
- Aluminio de alta calidad, pintura superficial de alta calidad.
- Sin sombras.

Aplicación: oficina, escuelas, hospitales, supermercados, centros comerciales, hoteles, áreas públicas, residencias.

TECHNICAL DATA/ DATOS TÉCNICOS

Item No.	Dimension	Power	LED Output	System Output
XPANEL-FLAT-R400	D404*H19mm	30W	2550Lm	2350Lm
XPANEL-FLAT-R600	D595*H19mm	45W	3800Lm	3600Lm
XPANEL-FLAT-R800	D780*H19mm	60W	5000Lm	4800Lm
XPANEL-FLAT-R1000	D1000*H19mm	80W	7000Lm	6800Lm
XPANEL-FLAT-R1200	D1200*H19mm	100W	10000Lm	9000Lm

PRODUCT OPTIONS/ OPCIONES DEL PRODUCTO

CCT	3000K 4000K 5000K 6000K
CRI	82+ 90+ 95+
Finish	White Black Silver Custom Color
Dimming	On/off 1-10V DALI Color Changing
Emergency	None 1.5 hours, half power
Sensor	None Motion and daylight sensor

